




1. Make the suspension ring slide in the groove



2. Make the pins slide in the groove



3. Assemble the corners with 3 angles

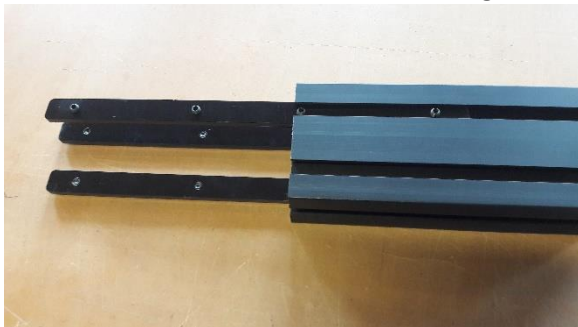

4. Assemble the lengths with 3 flat parts



5. After assembly of the frame, fix the velvet